



AIR OPERATED COLLAR & CUFF PRESS MOD BL/CLP SERIES



The true alternative for quality ironing of shirt collars and cuffs.

- Triple form, one collar and two cuffs
- Head in stainless steel
- Buck heated with steam (BL CLP/V) or electrically (BL CLP /E -3,1 KW)
- Buck cold or steam-heated, with connection for vacuum.
- Pressing pressure adjustable
- Two-button closing with device for simultaneous or pedal operation
- Accident-prevention protection on the head
- Pressure timer.
- 3-layer lower padding with pure silicon foam.

Options:

- Built-in, high-pressure 0.37KW - 0.5HP vacuum unit.
- RAFFAELLO computer module for programming pressure and vacuum times - 9 programs. User friendly software.
- Air-Water spray gun.




Made in Italy with Italian Fashion Mind



PRESSING MACHINE TECHNICAL SPECIFICATIONS


| PARAMETER | | DESCRIPTION |
|--------------------------------|------------------------------|---|
| Voltage | BL CLP/V/ASP BL CLP/E/ASP | - 230 V/1/50-60 Hz 400 V/3/50-60 Hz |
| Boiler capacity BOI (optional) | Lt. | 24.5 |
| Vacuum power VA (optional) | Kw | 0.55 |
| Boiler resistance BOI | Kw | 12 or 15 or 18 |
| Air pressure | Bar | Max 7 |
| Steam pressure | Bar | Max 4,5 |
| Weight of machine | Kg | 220 + 350 |
| OVERALL DIMENSION | | |
| Width | cm | 125 + 170 |
| Depth | cm | 120 + 135 |
| Height | cm | 140 + 180 |

MAIN BUCK TABLES (MM)

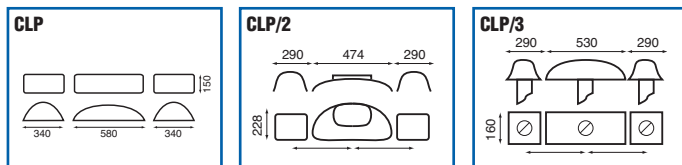

ASSEMBLY AND PREPARATION OF THE MACHINE

| DESCRIPTION | mm | mm | DIMENSION |
|---------------------|--------|--------|-----------|
| ELECTRICAL POWER | | B2 60 | |
| CONDENSATION RETURN | C1 640 | C2 520 | 1/2" |
| AIR EXHAUST | E1 300 | E2 550 | Ø 125 |
| STEAM | F1 640 | F2 90 | 1/2" |
| AIR INLET | H1 230 | H2 35 | 3/8" |

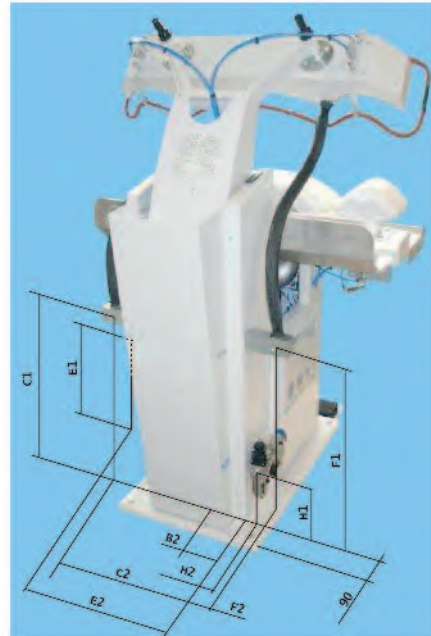

ROTONDI group Srl
 Via Fratelli Rosselli, 14/16
 20019 Settimo Milanese (Milano) - Italia
 Tel. (+39) 02.335.01.224 - Fax (+39) 02.335.01.329
 E-mail: rotondi@rotondigroup.it
www.rotondigroup.com

Agente: